


Hinowa®

Presents the new

Tracked Aerial Platform

LIGHT LIFT 23.12

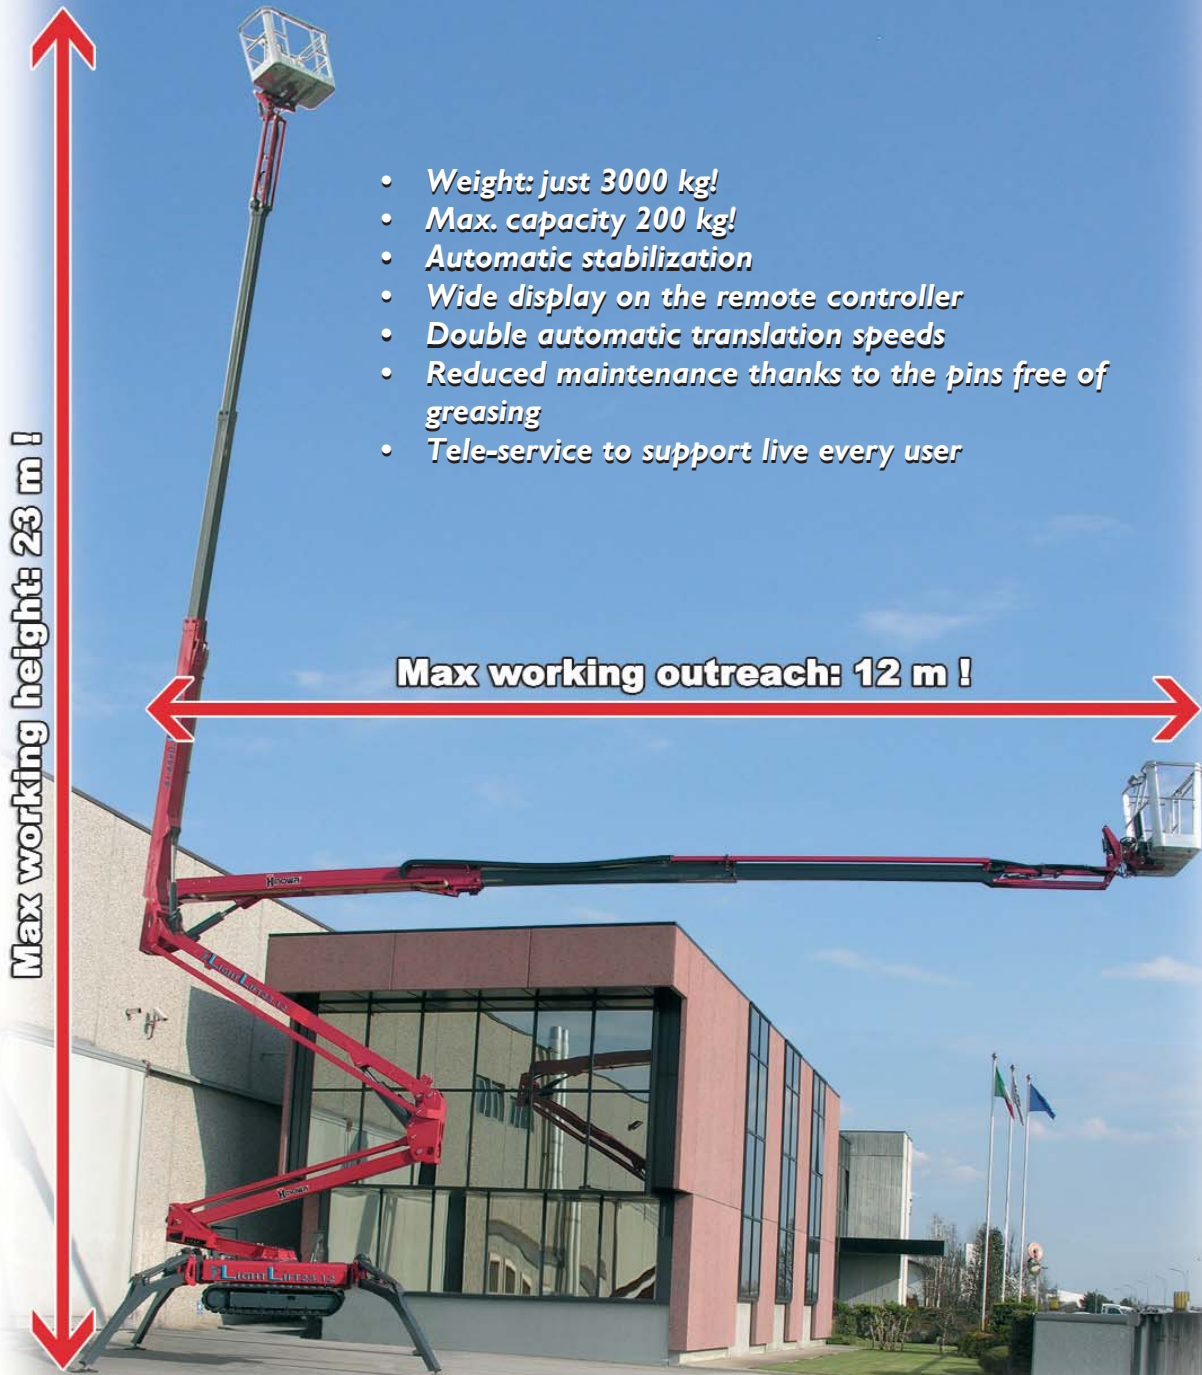

- *Weight: just 3000 kg!*
- *Max. capacity 200 kg!*
- *Automatic stabilization*
- *Wide display on the remote controller*
- *Double automatic translation speeds*
- *Reduced maintenance thanks to the pins free of greasing*
- *Tele-service to support live every user*

Max working height: 23 m !

Max working outreach: 12 m !

PLATFORM TECHNICAL DATA

	CAPACITY 200kg	CAPACITY 120kg
PLATFORM HEIGHT (floor)	19700mm	21120mm
MAX.WORKING HEIGHT	21780mm	23200mm
STANDARD BASKET DIMENSIONS	1300x600 H1100 mm	
HORIZONTAL REACH (WITHOUT BASKET ROTATION)	9610mm	11000mm
MAX. HORIZONTAL WORKING REACH (WITHOUT BASKET ROTATION): ..	10020mm	11400mm
SLEWING (not continuous)	360°	
BASKET SLEWING	124°(+/-62°)	
PLATFORM CAPACITY	200 kg	120 kg
N°. of OPERATORS	2	1
JIB-TIPO ARTICOLAZIONE	/	85°(-1°/-86°)
JIB-TYPE SWIVEL HEAD	1°/2,2%	
TOTAL WEIGHT	3000 kg (petrol version)	
THERMAL MOTOR:	HONDA iGX440-15CV-3600 rpm	
.....	PERKINS 402.05 - 14CV-3600 rpm	
ELECTRIC MOTOR	2.2 kw/230V/50Hz monofase 1500 rpm	
ELECTRIC PLANT VOLTAGE	12 V	
PUMPS	2 x 4,27cc	
MAX. TRANSFER SPEED (Thermal engine)	(autotwosped) 1,0/1,7 km/h	
STAB. PLANT PRESSURE	160 bar	
MAX SLOPE ALLOWED IN TRAVERSING MODE	15°	
AERIAL PART PLANT PRESSURE.....	200 bar	
MAX. WIND SPEED	12,5 m/s	
MAX. ACCEPTED MANUAL FORCE	400 N	

