

2500 E



www.ommelift.com

Trailer lift - Telescopic


Dealer:

OMMELIFT



Built to last - ask our users!

2500 E Trailer lift

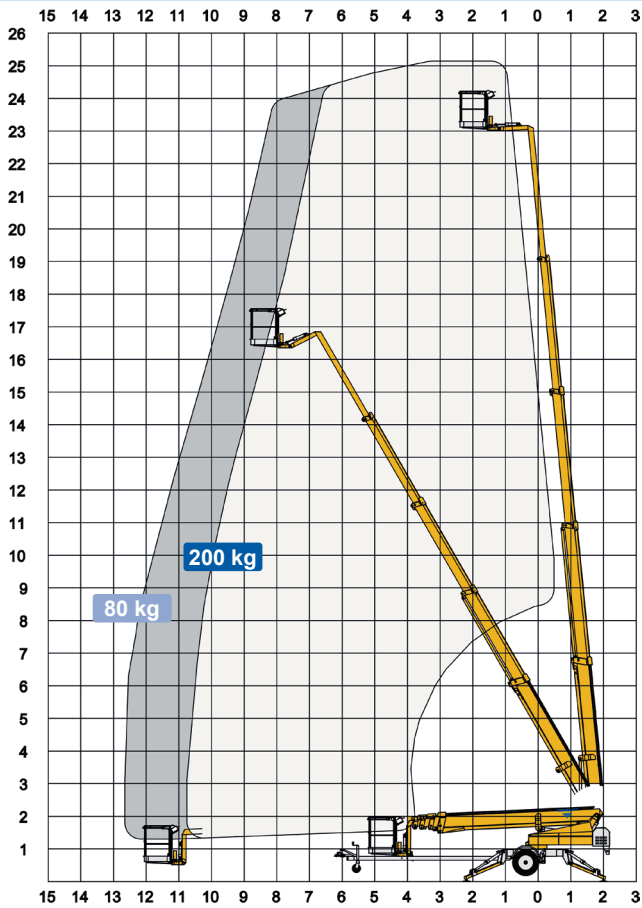

Technical Data:	2500 E	2500 EB	2500 EBD
Max. working height	25.1 m		
Max. platform height	23.1 m		
Max. outreach	12.6 m		
Up and over clearance	-		
Angle boom length (boom + basket)	2.0 m		
Jib length (jib + basket)	-		
Vertical jib rotation	-		
Turret rotation	± 355°		
Basket rotation	± 41°		
Max. basket load	200 kg		
Basket size	1.25 x 0.8 x 1.1 m		
Stabilizer pad size	ø200 mm		
	⁵ Petrol ⁶ Diesel	230V / 16A	BATTERY HYBRID
Engine	⁵ Optional ⁶	⁵ Optional ⁶	⁶ 14kW/18.8hp
Fuel tank capacity			
Generator	24 V / 22 A		
Battery pack	24V/200Ah/5h		24V/200Ah/5h
Charger	24 V / 30 A		24 V / 30 A
Double charger system	Optional		Optional
Elec. descent	Optional	Optional	Optional
See www.ommelift.com for more features and options			
Self-propulsion with hydraulic engagement of traction rollers	Standard		
Gradeability	14% / 8°		
Ground to tire clearance at max. set-up	Min. 170 mm (5.9% / 3.4°)		
Engine only version available			
Total weight	3000 kg	3060 kg	3180 kg
Ground pressure, outrigger pad	20.0 kg/cm ²	20.0 kg/cm ²	20.0 kg/cm ²
Ground pressure with 0.4 x 0.4 m spreader plate	1.1 kg/cm ²	1.1 kg/cm ²	1.1 kg/cm ²
Max. force, outrigger	17.1 kN	17.1 kN	17.1 kN
Hydraulic stabilizers	Standard		
Controls	Proportional		
Flush basket mount	Standard		
Elec. power outlet in basket	Standard		
Tool trays in basket	Standard		

